


LEGEND :

<p><b>PEF</b> PEF ROD BACKING: Foam backing rod with sealant to cavity in Window perimeter that forms a waterproof air-seal. ( Sealant 2:1 Ratio )</p> <p><b>AJ</b> ALUMINIUM JOINERY: Selected double glazed aluminium joinery</p> <p><b>IL</b> INTERNAL LINING: Selected Internal Lining</p> <p><b>BW</b> BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required ( 9.1.7.2 E2/AS1 )</p> <p><b>CC</b> CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p><b>CB</b> CAVITY BATTEN: 45x20 KLC Generation II, MicroPro H3.2 FJ Cavity Batten to form a 20mm cavity</p>	<p><b>FT1</b> FLASHING TAPE: Flashing tape over wrap 70mm (50 min) turn-down required in corners only. Refer to Fig. 72 of NZBC E2/AS1</p> <p><b>FT2</b> FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped over aluminium head flashing or 2nd layer of Building Wrap to taped joint or top of frame</p> <p><b>TF</b> TIMBER FRAME: H1.2 min treated timber framing</p> <p><b>WB</b> WEATHER BOARD: KLC Generation II, MicroPro H3.2 Bevel Back Weatherboard, Profile to NZS 3617</p> <p><b>IN</b> INSULATION: Selected Insulation</p> <p><b>HF</b> HEAD FLASHING: Aluminium head flashing with minimum 15 degree fall and optional hemmed edges as per table 7 E2/AS1</p> <p><b>TP</b> TIMBER PACKER: MicroPro H3.2 Treated Packer</p>	<p><b>SS</b> SILL SCRIBER: MicroPro H3.2, Horizontal batten under window as necessary to suit profile, sealant to back of sill scriber</p> <p><b>WL</b> WINDOW LINER: As Specified ( We Recommend MicroPro H3.2 Liners &amp; Sills )</p> <p><b>WH</b> WEATHERHEAD: MicroPro H3.2, Horizontal batten above window as necessary to suit profile, shaped to shed water, sealant to back of head scriber</p> <p><b>WZ</b> WANZ SUPPORT: Provide window support as required by joinery manufacturer</p> <p><b>WS</b> WINDOW SCRIBER: KLC Generation II, MicroPro H3.2 profile cut to fit weatherboard, sealant to back of scriber and 75 x 3.15mm Galvanised nail in 3mm predrilled hole. 40x18 or 65x18 depending on weatherboard size</p>
---	---	--

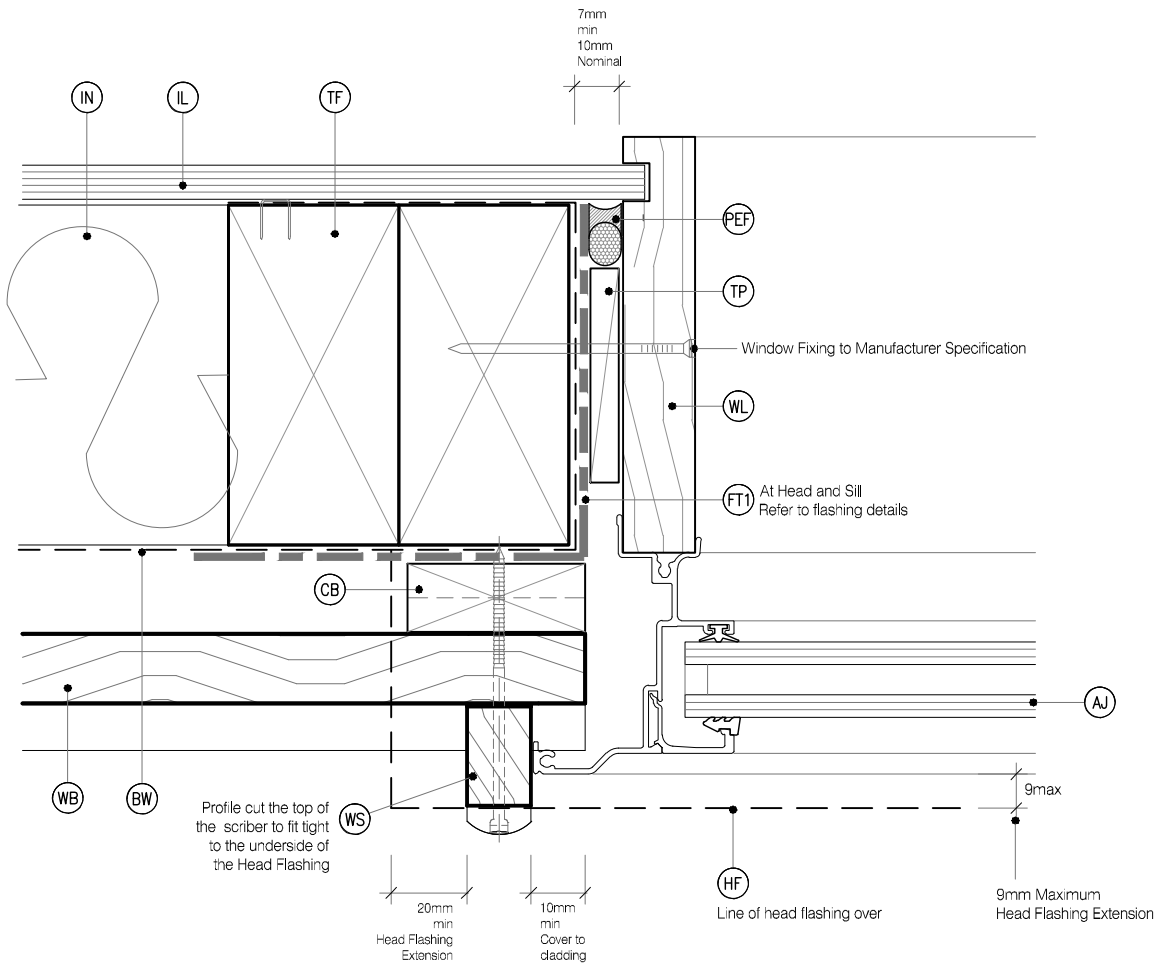

MicroPro® Wood Treatment Technology

- KLC use the MicroPro Micronized Copper Azole (MCA) based preservative system for their wood products. It accounts for 80% of wood treated in the US for domestic applications.
- Micronized Copper Azole (MCA) preservatives are EPA-approved for use in NZ and AUS to NZS3640:2003 and AS1604:12012
- MicroPro preservative is applied using high-pressure and vacuum-pressure in the impregnation process in KLC's modern, automated treatment facility.
- Cut End Treatment: All cut ends surfaces are to be double coated and sealed before fixing. With an alkyl (oil based) primer
- MicroPro preservative solution has benefits of reduced corrosivity. Use Hot Dip Galvanised Fasteners & Stainless Steel fasteners. MicroPro may be placed in direct contact with Aluminium Building products in interior applications, and above ground exterior applications that provide proper water drainage.
- MicroPro® is the first wood treatment process to be EPP (Environmentally Preferable Product) certified by Scientific Certification Systems based on a life cycle assessment.
- MicroPro® is environmentally sustainable, is low leaching, low VOC emissions and the award of the GREENGUARD Children and Schools Certification from the Greenguard® Environmental Institute.
- MicroPro® Wood Treatment Technology has received a Global GreenTag GreenRate™ Level A this declaration is 'Fit-for-Purpose' and confirmed for Green Building compliance.
- MicroPro® Wood Treatment Technology has received GreenTag PhD™ proving claims that MicroPro® is safe for human health (and ecosystems).

CAD REF : KLC CF20 BB10-15 - WINDOW DETAILS.dwg DATE : 18/10/2018



[www.klc.co.nz](http://www.klc.co.nz)  
 DETAILS MAY BE SUBJECT TO CHANGE WITHOUT NOTICE  
 COPYRIGHT © "KLC LIMITED" ALL RIGHTS ASSERTED

TYPE **Generation II H3.2 Exterior Cladding Systems Bevel Back Weatherboard - Cavity Fix**

NAME **Window Jamb Detail - Aluminium Joinery**



DRAWING SCALE 1:2 @ A4	ISSUE DATE 18/10/2018
DRAWING No <b>KLC CF20 BB12</b>	REVISION <b>1</b>