


LEGEND :

- |  |   |   |
|--|---|---|
| <b>CB</b> CAVITY BATTEN: 45x20 KLC Generation II, MicroPro H3.2 FJ Cavity Batten to form a 20mm cavity   | <b>FT2</b> FLEXIBLE FLASHING TAPE: Additional underlay of flexible flashing tape lapped over Apron flashing | <b>HS</b> HEAD SOFFIT SCRIBER: KLC Generation II, MicroPro H3.2. Fix with 75 x 3.15mm Galvanised nail in 3mm predrilled hole  |
| <b>IL</b> INTERNAL LINING: Selected Internal Lining  | <b>WB</b> WEATHER BOARD: KLC Generation II, MicroPro H3.2 Bevel Back Weatherboard. Profile to NZS 3617      | <b>AF</b> APRON FLASHING: Materials as per E2/AS1 4.0, Coating to match roofing material or refer E2/AS1 Table 21. Flashing Cover 130mm min. ( L, M & H ≥ 10° ) All others 200mm Refer Table 7 E2/AS1 |
| <b>BW</b> BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required ( 9.1.7.2 E2/AS1 ) | <b>MR</b> METAL ROOFING : Selected Metal Roofing  | <b>SL</b> SOFFIT LINING: As Selected ( Typically 7.5mm Hardies Soffit Liner )   |
| <b>IN</b> INSULATION: Selected Insulation  | <b>RU</b> ROOFING UNDERLAY: Selected Roofing Underlay As Per AS/AZS4200 with Mesh or Self Supported         |   |
| <b>TF</b> TIMBER FRAME: H1.2 min treated timber framing  | <b>TP</b> TIMBER PACKER: Cant Strip, MicroPro H3.2 Treated  |   |

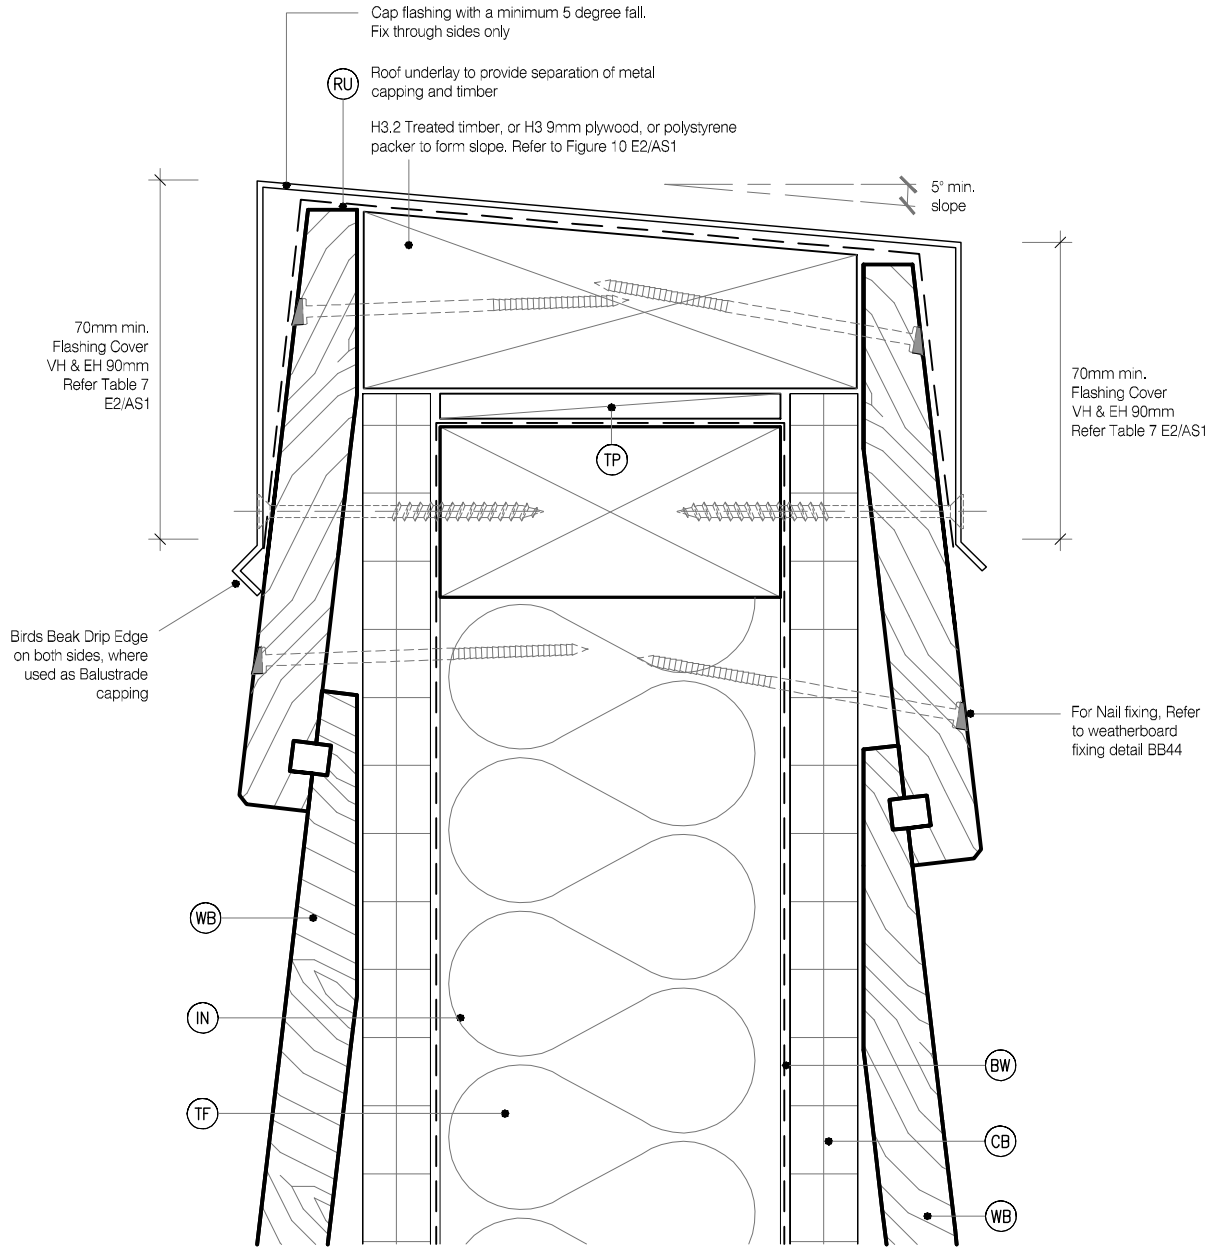

MicroPro® Wood Treatment Technology

- KLC use the MicroPro Micronized Copper Azole ( MCA ) based preservative system for their wood products. It accounts for 80% of wood treated in the US for domestic applications.
- Micronized Copper Azole ( MCA ) preservatives are EPA-approved for use in NZ and AUS to NZS3640:2003 and AS1604:12012
- MicroPro preservative is applied using high-pressure and vacuum-pressure in the impregnation process in KLC's modern, automated treatment facility.
- Cut End Treatment : All cut ends surfaces are to be double coated and sealed before fixing. With a alkylid ( oil based ) primer
- MicroPro preservative solution has benefits of reduced corrosivity. Use Hot Dip Galvanised Fasteners & Stainless Steel fasteners. MicroPro may be placed in direct contact with Aluminium Building products in interior applications, and above ground exterior applications that provide proper water drainage
- MicroPro® is the first wood treatment process to be EPP ( Environmentally Preferable Product ) certified by Scientific Certification Systems based on a life cycle assessment.
- MicroPro® is environmentally sustainable, is low leaching, low VOC emissions and the award of the GREENGUARD Children and Schools Certification from the Greenguard® Environmental Institute.
- MicroPro® Wood Treatment Technology has received a Global GreenTag GreenRate™ Level A this declaration is 'Fit-for-Purpose' and confirmed for Green Building compliance.
- MicroPro® Wood Treatment Technology has received GreenTag PhD™ proving claims that MicroPro® is safe for human health (and ecosystems).

CAD REF : KLC CF20 BB60-66 - GENERAL DETAILS 03.dwg  
DATE : 18/10/2018



www.klc.co.nz

DETAILS MAY BE SUBJECT TO CHANGE WITHOUT NOTICE  
COPYRIGHT © "KLC LIMITED" ALL RIGHTS ASSERTED



TYPE **Generation II H3.2 Exterior Cladding Systems  
Bevel Back Weatherboard - Cavity Fix**

NAME **Balustrade Capping or Parapet Detail**



DRAWING SCALE  
1:2 @ A4

ISSUE DATE  
18/10/2018

DRAWING No <b>KLC CF20 BB65</b>	REVISION <b>1</b>
------------------------------------	----------------------